

Flexibility Matters

On the Design and Evaluation of Softwarized Networks

Wolfgang Kellerer

Technical University of Munich


IFIP Networking 2018

Zurich, Switzerland

May 14-16, 2018

with PhD students and postdocs

A. Basta, A. Blenk, P. Babarczy, M. He
P. Kalmbach, M. Klügel, A. Martinez,
J. Zerwas

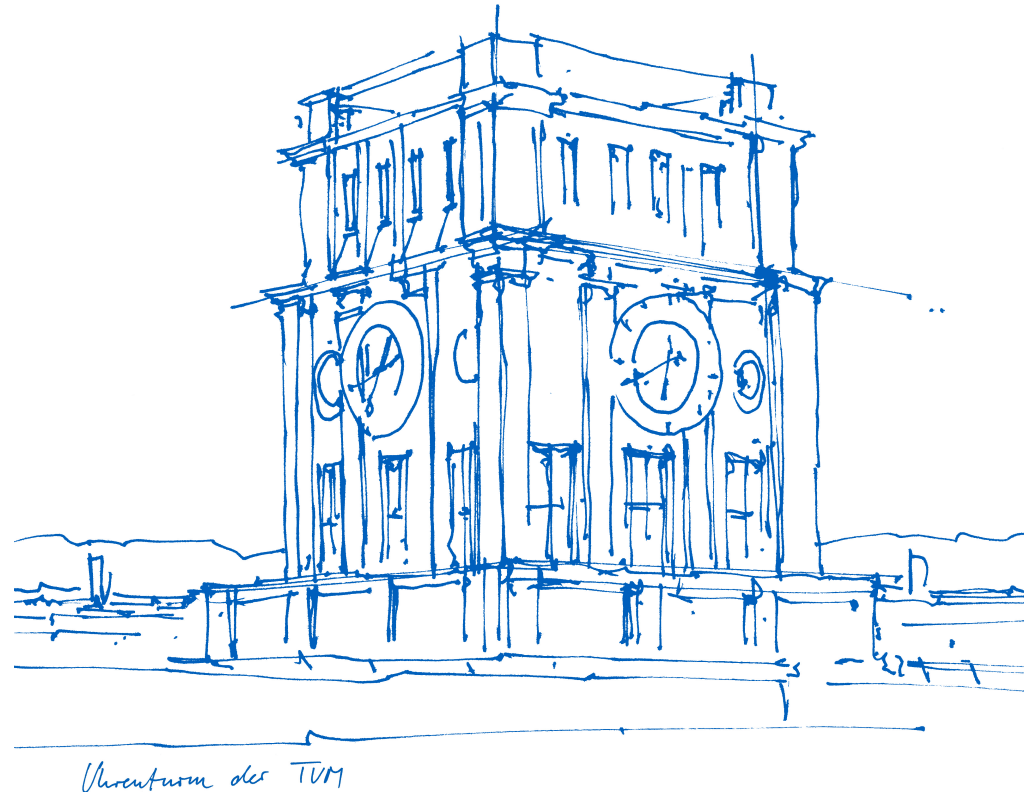


This work is part of a project that has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation program grant agreement No 647158 – **FlexNets (2015 – 2020)**.



European Research Council
Established by the European Commission

The rise of flexibility

- Flexibility is gaining increasing **attention** and **importance**

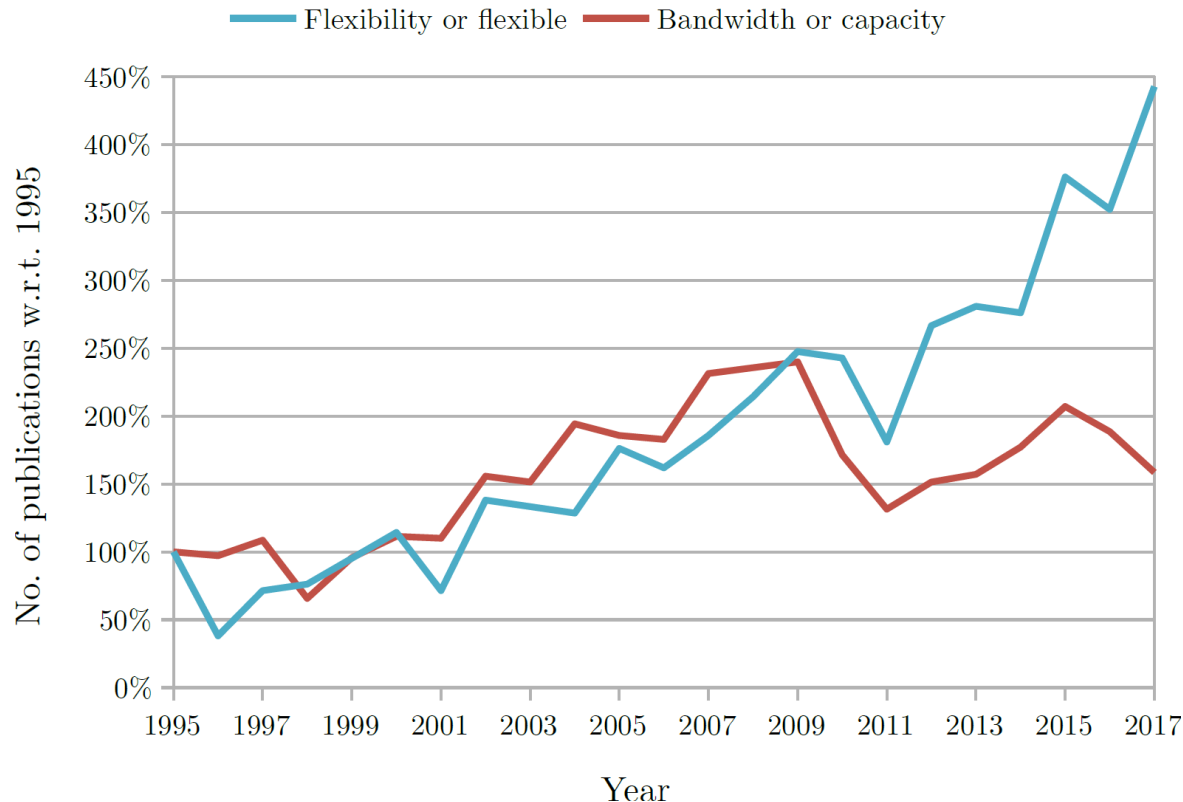

Evolution of the number of publications containing the words "flexible" or "flexibility" in contrast with those containing "bandwidth" or "capacity" in four major IEEE journals and magazines on communication, with respect to the number of publications in 1995.

Why?

- Networking today: **new requirements** from vertical industries and **dynamically** changing behavior of users and tenants
- Novel techniques to **softwarize networks**
- Less explicitly addressed: **flexibility** and hence **adaptation**

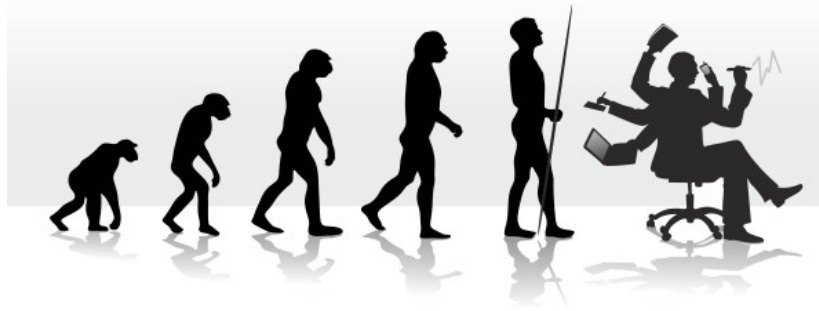


Image source: <http://www.paleoplan.com>




- Today, we will ...
 - ... present our **definition** of network flexibility and a **flexibility measure**, ...
 - ... give concrete use cases of how to apply ...
 - ... and show methods to speed up adaptations with ML.

Towards softwarized networks

The Internet is able to adapt its resources ...
... *somehow* (best-effort, TCP elasticity, BGP, OSPF)

early-days simplicity
→ complex and ossified network system

very slow adaptation to new requirements
→ reaction to dynamic changes hardly possible

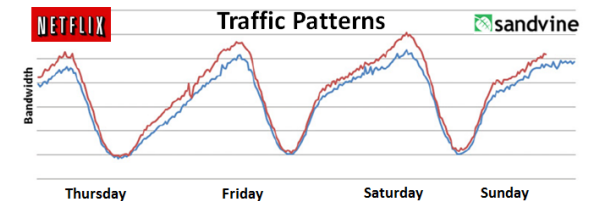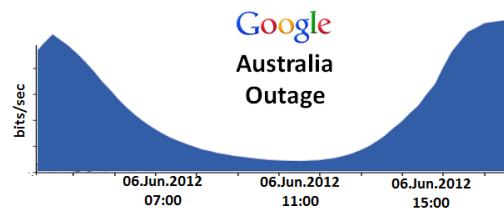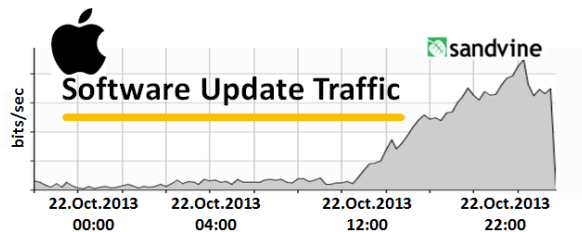


New concepts such as ...

**Network Virtualization (NV),
Network Function Virtualization (NFV), and
Software Defined Networking (SDN)**

*Softwarized
Networks*

...*promise* to **create and adapt networks and functions on demand in software**

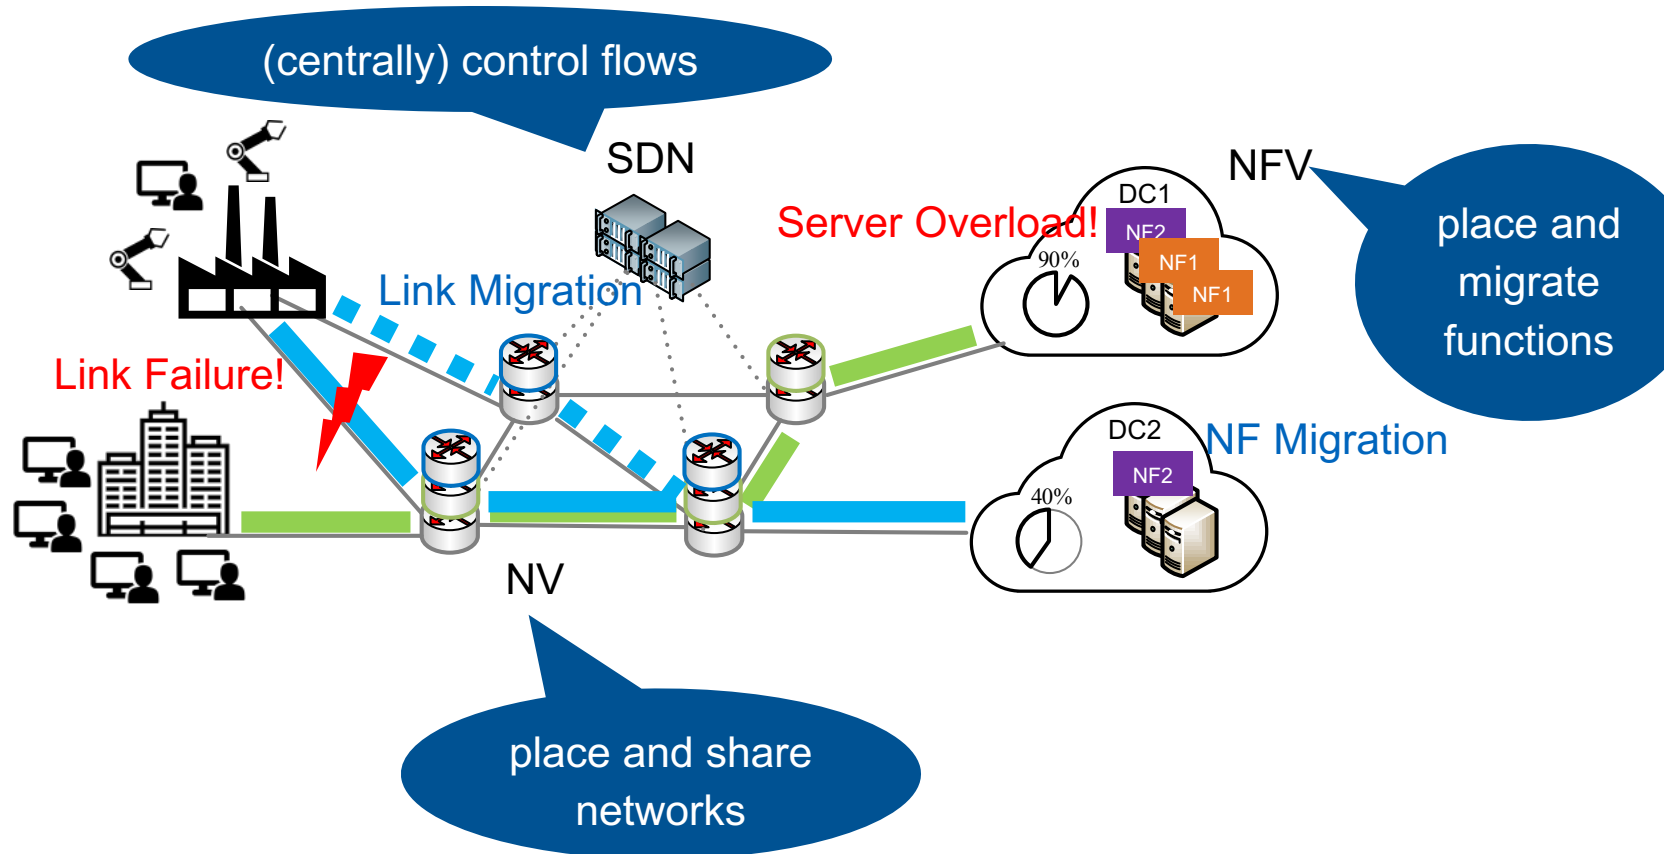

All problems solved?


- Are we fully flexible already?
- How far can we go? What is the optimal network design?

We need

- a **fundamental understanding** of how to provide flexibility
- a **quantitative measure** for flexibility pro and contra certain designs

For networks, **flexibility** = ability to *support new requests* to change design requirements (traffic pattern, latencies,...) in a *timely* manner via adaptation of resources (topology, capacity, ...) if needed

This work is part of a project that has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 program grant agreement No 647158 – **FlexNets (2015 – 2020)**.



Why do we think flexibility analysis is important?

- A survey on **5G** technology [1] reports “flexible and scalable network” as the **top motivation** for technology investment of 297 companies
- Enables operators to **cover the future!**
 - react to regulatory changes and fast arrival of new technologies
- A key **decision factor** between network designs
 - can be a tie-breaking decisive advantage for a certain network design
- For research and development
 - which technical concepts lead to more flexibility in network design ?
 - **optimize** networks **for flexibility**
 - **design guidelines** for more flexible networks
- SoA: lack of a concrete definition and a quantitative analysis!

[1] Sdxcentral. Carriers 5G Plans are Rooted in SDN/NFV, says Ixia Survey. [Online]. Available: [https://www.sdxcentral.com/articles/news/carriers-5g-plans-rooted-sdnfv-says-ixia-survey/2017/09/?c action=related articles](https://www.sdxcentral.com/articles/news/carriers-5g-plans-rooted-sdnfv-says-ixia-survey/2017/09/?c%20action=related%20articles)

How to define network flexibility? [3]

For network systems, **flexibility** = ability to *support new requests* to change design requirements (traffic pattern, latencies,...) in a *timely* manner via adaptation of resources (topology, capacity, ...) if needed

System?

- communication network (topology, flows, node functions, resources) serving a certain objective (e.g. highly reliable communication)

Note: in most cases, flexibility is not the objective


Request?

- “new challenges”, e.g., new flows, new (virtual) topology or new latency requirements

Note: explicit list or via a distribution (e.g. flow arrivals)

So: the more requests are supported the more flexible a system is?

Time?

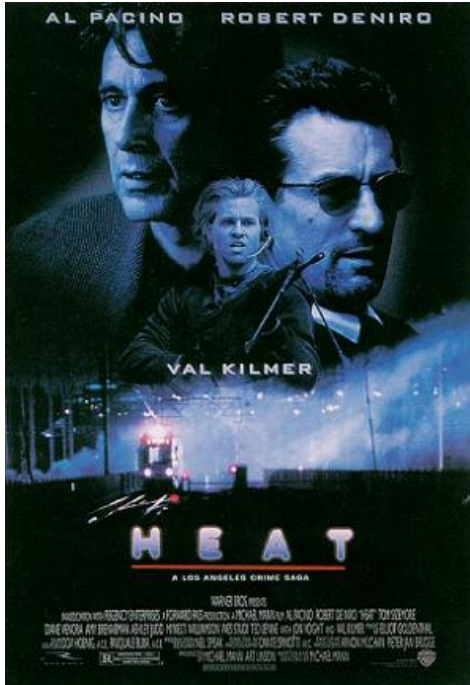

"Heatposter" by Source. Licensed under
Fair use via Wikipedia –
[http://en.wikipedia.org/wiki/File:
Heatposter.jpg#/media/File:Heatposter.jpg](http://en.wikipedia.org/wiki/File:Heatposter.jpg#/media/File:Heatposter.jpg)

What Robert de Niro on *flexibility* in HEAT (1995):

“Don’t get attached to anything you can’t walk out on in 30 seconds flat if you feel the heat around the corner.”

Not only the number of requests, but the *time* matters for flexibility!

how to consider for flexibility?

how to speed up adaptation?

How to define network flexibility?

For network systems, **flexibility** = ability to *support new requests* to change design requirements (traffic pattern, latencies,...) in a *timely* manner via adaptation of resources (topology, capacity, ...) if needed

System?

- communication network (topology, flows, node functions, resources) serving a certain objective (e.g. highly reliable communication)

Request?

- “new challenges”, e.g., new flows, new (virtual) topology or new latency requirements

Time?

- the network may **need to adapt** the state of the topology, flows, functions, or resources → it should **meet a time constraint**
- the network may be designed in a way that it simply accommodates requests **without adaptations** → meets any time constraint


Flexibility aspects

no single quality indicator for a *Quality of **Flexibility*** (QoF)

- similar to QoS: to be regarded by case

we propose: ***flexibility aspects*** [1, 3]

- similar as we do with QoS (rate, delay, throughput, jitter,...)

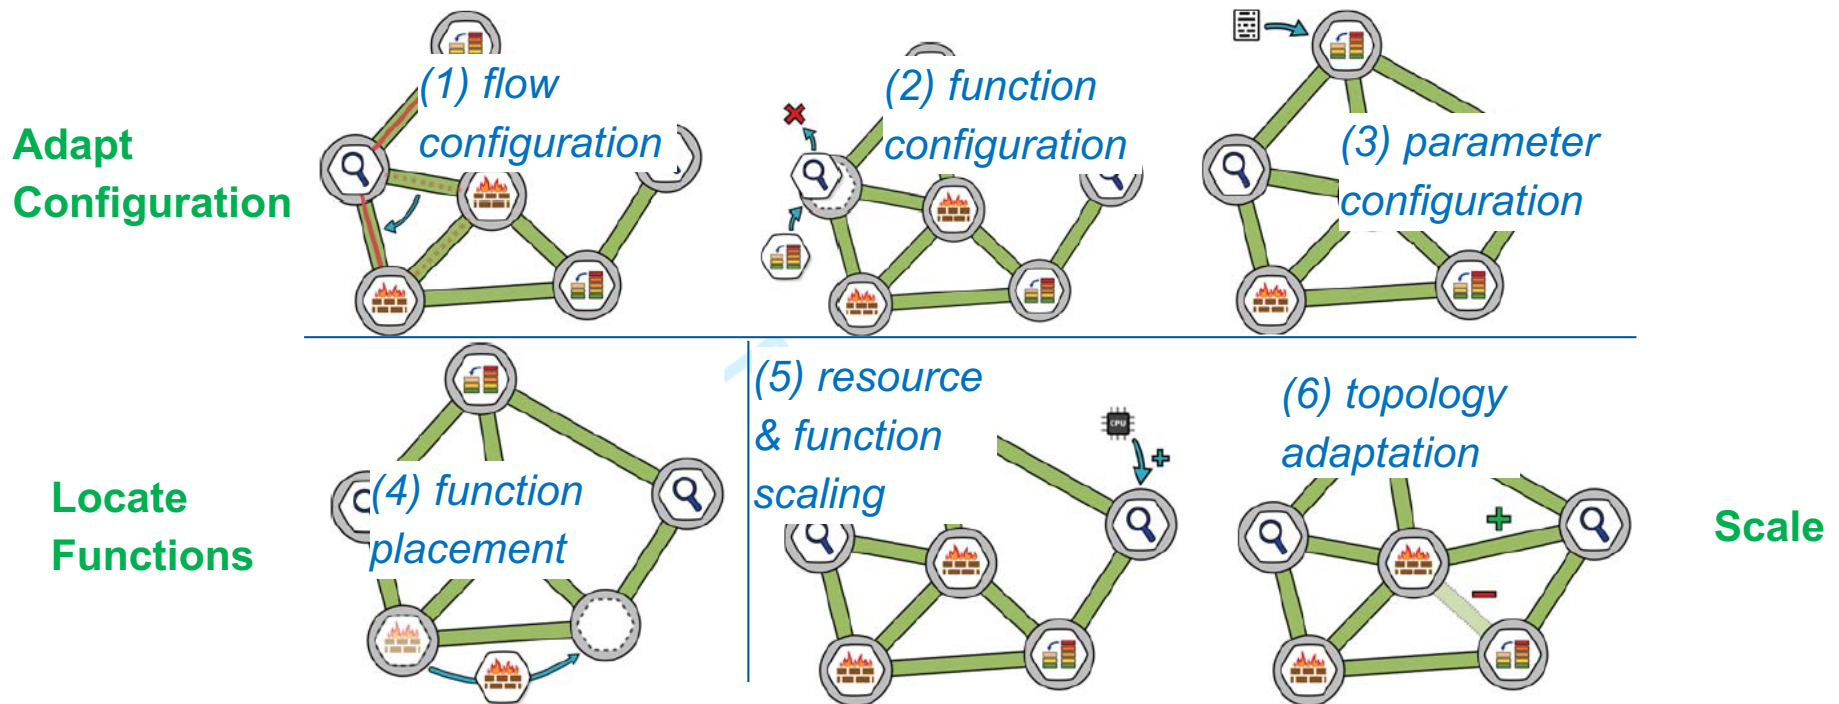

[3] W. Kellerer, A. Basta *et al.*, "How to measure network flexibility? A proposal for evaluating softwarized networks," *IEEE ComMag*, 2018.

[2] W. Kellerer, A. Basta, A. Blenk, Using a Flexibility Measure for Network Design Space Analysis of SDN and NFV, SWFAN'16, IEEE INFOCOM Workshop, April 2016.

- SDN: is about **flow control**, also supports **network resources scaling**
- NFV: targets flexible **placement**, degrees of freedom in **configuration** and **function scaling**
- NV: targets flexible (virtual) **topologies**, also provides degrees of freedom for **configuration** and **scaling** of these (virtual) networks

Aspect (see Sec. III-B)	SDN	NFV	NV
Flow Configuration: flow steering	●		
Function Configuration: function programming		●	
Parameter Configuration: change function parameters		●	●
Function Placement: distribution, placement, chaining		●	●
Resource and Function Scaling: processing and storage capacity, number of fuctions	●	●	●
Topology Adaptation: (virtual) network adaptation			●

Cost vs. Flexibility

- Flexibility has to be also evaluated against cost
- It is not clear if flexibility adds more **cost overhead**
- A flexible system can also achieve **cost savings** on the longer run

→ **trade-off** needs to be studied and evaluated

- We need to consider all different cost factors

Resources (CAPEX)	Operation (OPEX)	Adaptation/Migration	SLA
resource overhead	control, data plane throughput	synchronization overhead	fines
network complexity	control, data plane latency	configuration latency	flow interruption
software complexity	energy consumption	topology adaptation latency	network interruption

[3] W. Kellerer, A. Basta *et al.*, “How to measure network flexibility? A proposal for evaluating softwarized networks,” *IEEE ComMag*, 2018.

Flexibility matters!

- new requirements for networking research include flexibility
- network softwarization (SDN, NFV, NV) provides flexibility

Flexibility definition is important!

- for a meaningful system analysis and comparison
- for a trade-off evaluation with performance and cost
- to design for flexibility

We need a measure!

Flexibility qualitative measure exercise



Fixed-set tool

vs.



Source: Magazin.com

Re-configurable tool box

- Which tool is more flexible?
 - re-configuration shows more potential to be **more flexible**
- When can both exhibit the same flexibility?
 - maybe there is **no need to change** → probability of requests make a difference
 - maybe both cannot satisfy my requests → **infeasible**
- When can the re-configurable tool be less flexible?
 - **adaptation time** → might make the re-configurable object not very useful


Flexibility Measure – Proposal

System Request: "challenge" constraint on max. adaptation Time

$$\varphi_T^{aspect}(S) = \frac{|supported\ new\ requests\ within\ time\ constraint\ T|}{|given\ new\ requests|}$$


- fraction of the number of **new requests** that can be supported in a **time interval T** of all given new requests [3]

$$\varphi_{T \rightarrow \infty}(S) = \frac{|supported\ new\ requests|}{|given\ new\ requests|}$$

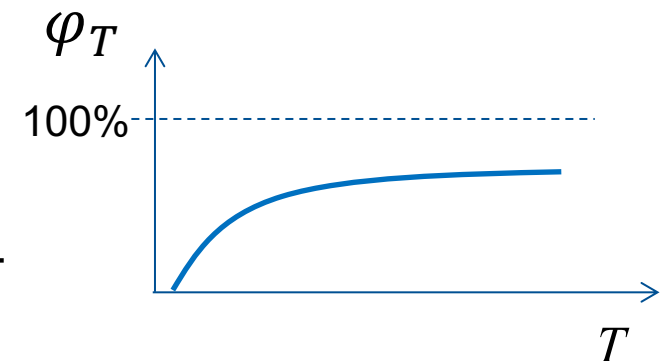


A simple illustration (1)


- **New request** to an SDN network: Controller Capacity (cc) is increased
- Can such new request be **supported**?
e.g. by migrating the controller to a node with higher Node Capacity (nc)
- BUT: migration time **cannot exceed** “1 hop” (T)

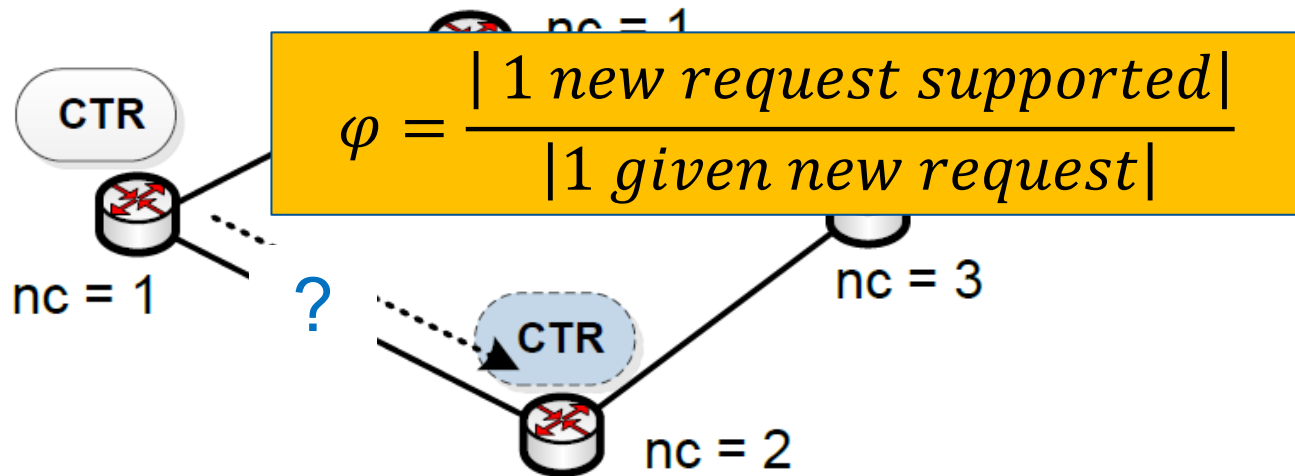

A simple illustration (2): more requests

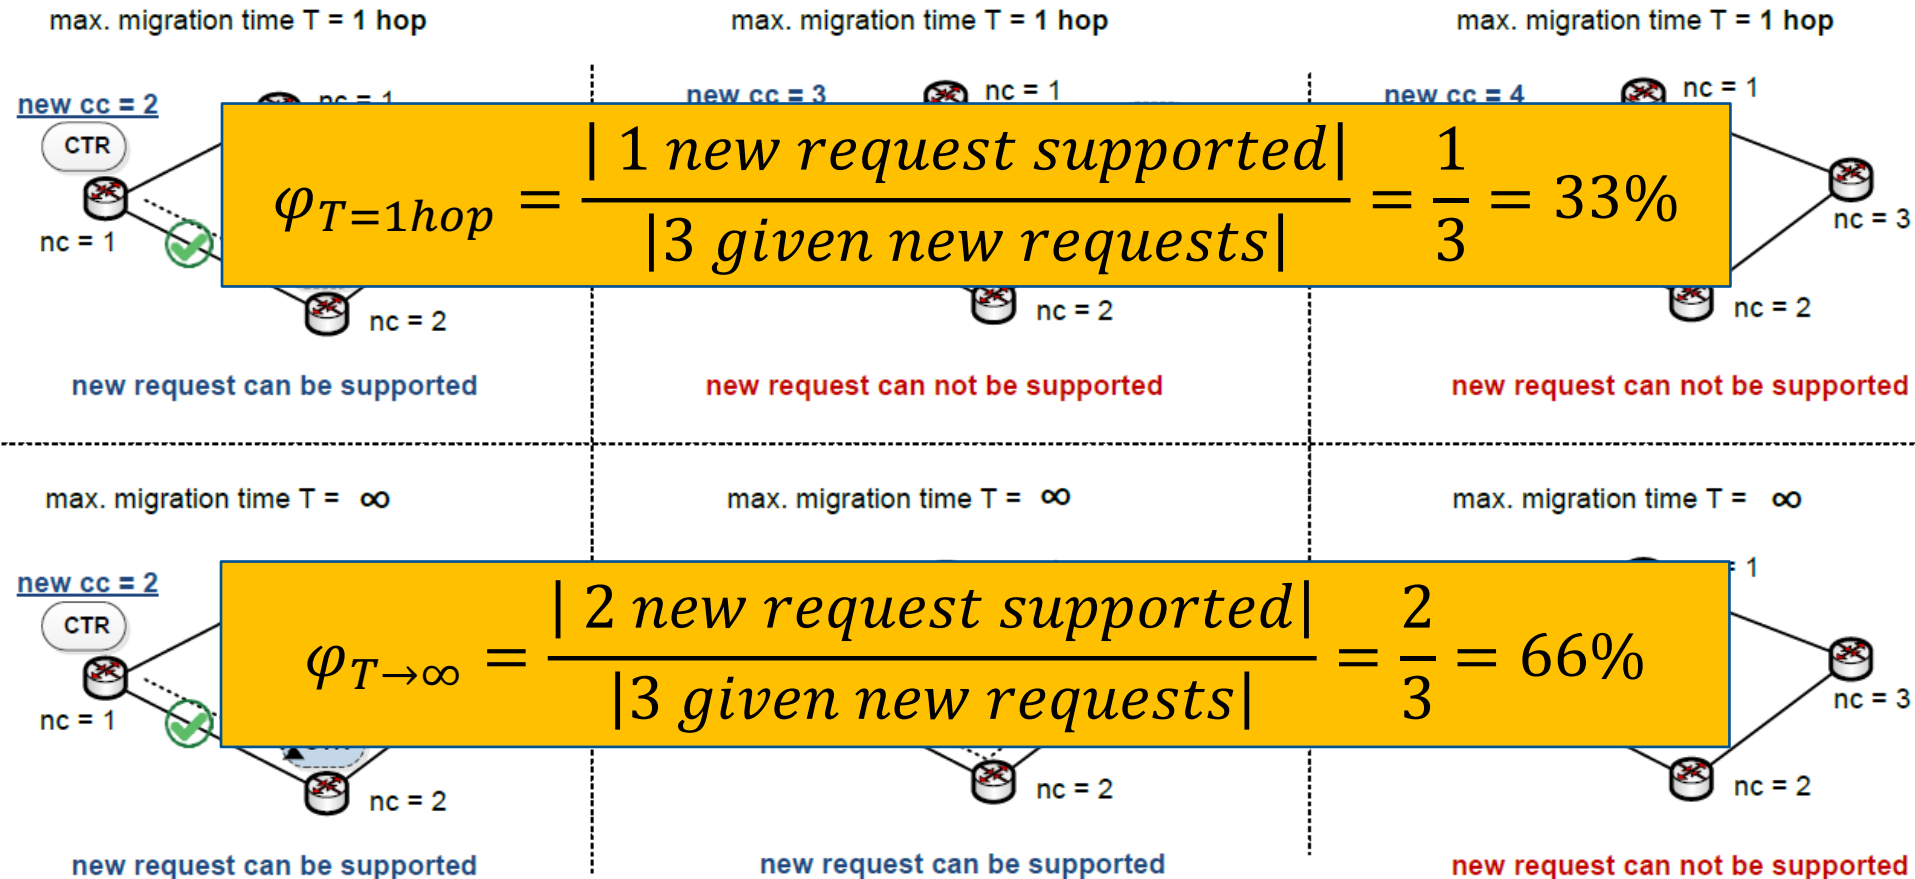

Case study 1: Dynamic Controller Placement

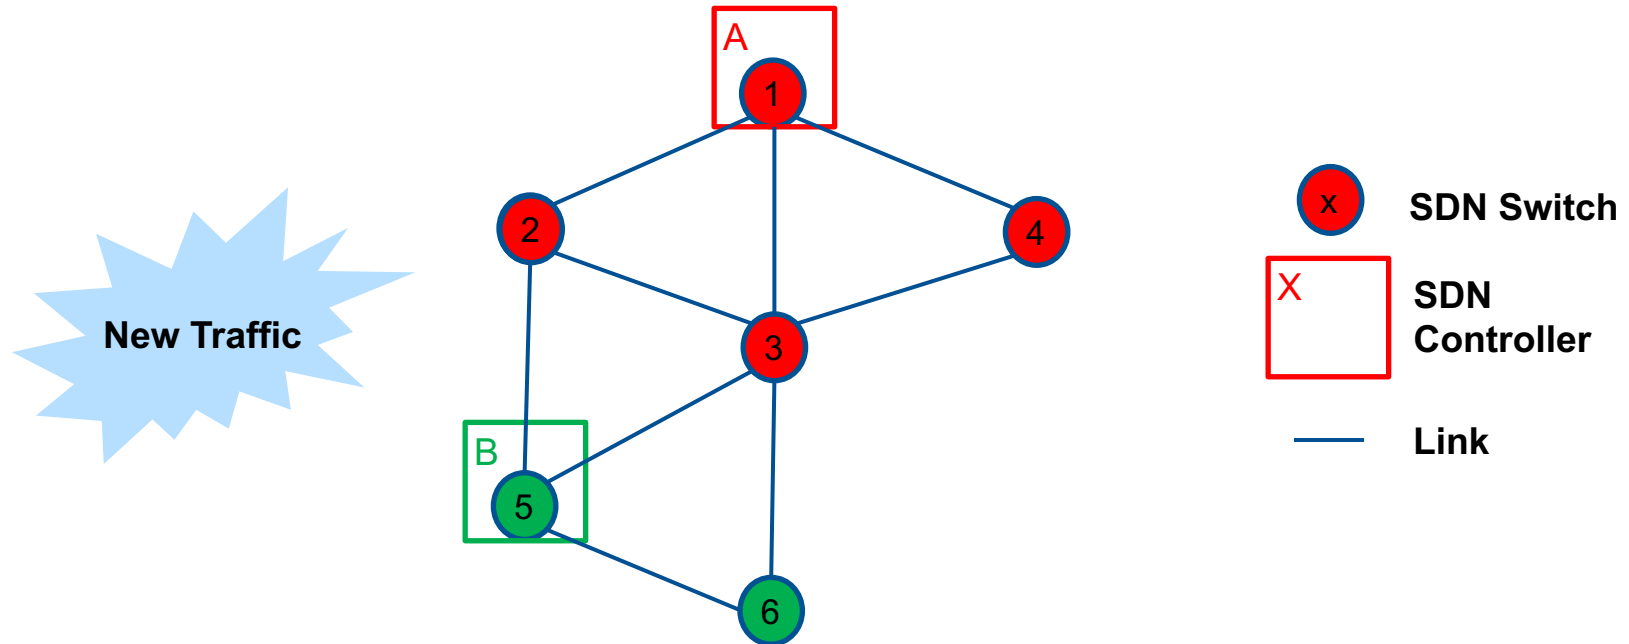

- Traffic fluctuations require control plane to adapt in order to achieve better control performance → *Dynamic Control Plane* [4]
 - SDN controller migration
 - SDN switch reassignment

Case Study	Flexibility Aspect	New Request	Flexibility Measure	System Objective	Cost in focus
dynamic SDN controller placement	function placement	new flow arrival (from distribution)	fraction of successful controller placements	control performance: (min. avg. flow setup time)	operation latency (OPEX): avg. flow setup time

Case study 1: Dynamic Controller Placement

- Application of the flexibility measure

Varying traffic flow profiles


max. adaptation time threshold
(will be varied)

$$\varphi_T(S) = \frac{|\text{supported requests within } T|}{|\text{given new requests}|}$$


SDN controller migration and switch reassignment can be done within T


- Flexibility → Migration Success Ratio
 - Calculate controller migration and switch reassignment time $T_{migration}$
 - If $T_{migration}$ smaller than T → count as a supported request

Case study 1: Dynamic Controller Placement

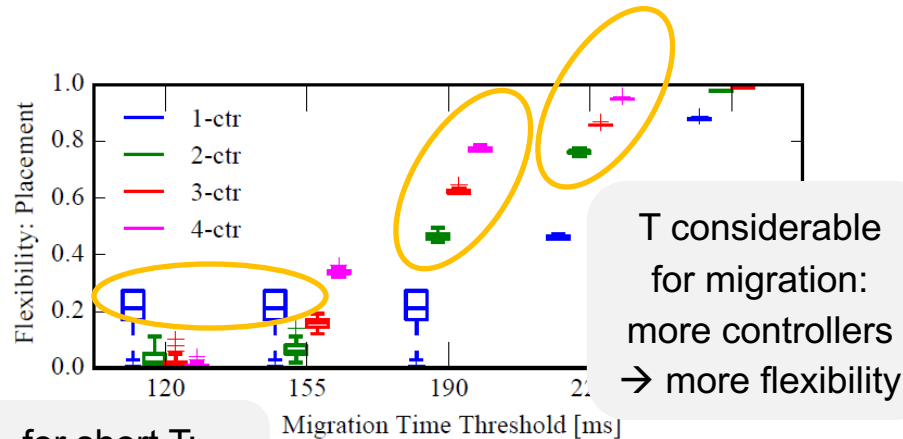

for short T:
1 controller is
more flexible

in terms of successful control plane migration.

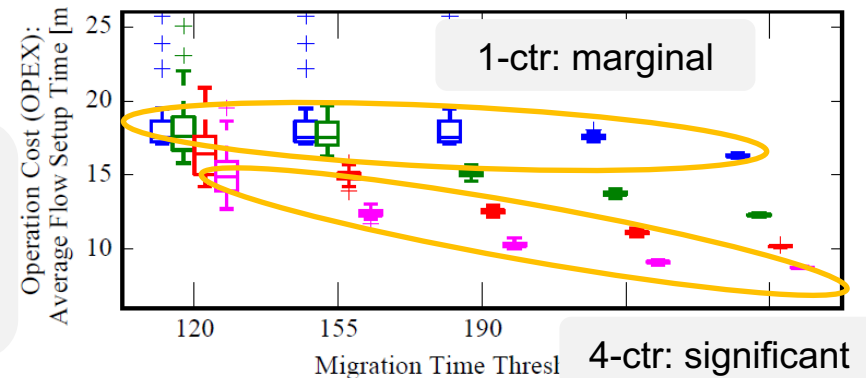

(b) Operation cost (OPEX) in terms of the average flow setup time.

intuitive

unexpected!

- **More controllers** (larger migration time threshold) → higher flexibility
- **Single controller** case: more flexible for **tight time threshold** as probability that single controller stays in optimal location is high
- 1 controller → **marginal** performance improvement vs. adaptation T
- 4 controllers → **significant** performance improvement vs. adaptation T
- However, if we consider **all cost factors**, we can reach a trade-off!

Case study 2: SDN Resilience


- Flexibility aspect of **flow configuration** for a **resilience** scenario in an SDN network under a given **recovery time** threshold T [3].
- Compare 3 systems: 1:1 protection vs 1+1 protection vs restoration
- New requests: all possible **single and dual link failures**
- Objective: system recovery
- Flexibility measure: fraction of recoverable failures

Case Study	Flexibility Aspect	New Request	Flexibility Measure	System Objective	Cost in focus
failure recovery in SDN (protection vs. restoration)	flow configuration	all possible single and dual failures	fraction of recoverable failures	system recovery: (single and dual failures)	resources overhead (CAPEX): node and link reservation

Case study 2: SDN Resilience

- **1:1 protection**
 - primary and backup paths pre-calculated
 - backup path is inactive
 - need switching time between primary and backup in case of a failure
- **1+1 protection**
 - primary and backup paths pre-calculated
 - primary and backup paths are both active
 - recovery time is almost instantaneous!
- **Restoration**
 - no backup path in advance
 - switch detect failure → controller informed → re-routes affected flows
 - recovery time is very critical

Case study 2: SDN Resilience

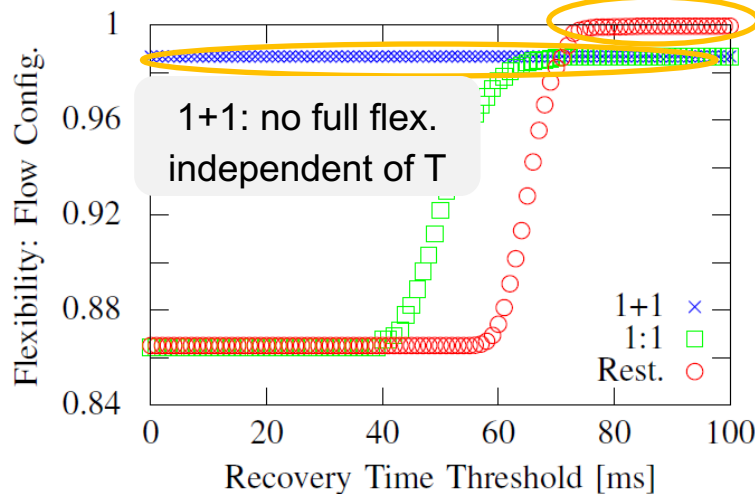

(a) Flexibility in terms of covered single and dual link failures.

	Resources Cost (CAPEX)	
	Node reservation: Avg. number of flow table entries	Link reservation: Number of required links
1 + 1	11.78	13038
1 : 1	11.78	13038
Rest.	5.05	5400

(b) System resources cost (CAPEX) in terms of nodes and links used for reservation.

intuitive

- 1+1 **can not** reach **full flexibility**

- However, 1+1 is obviously **independent** of **recovery time**

intuitive

- Restoration can cover **all failures** if given enough recovery time

- Protection imposes more than **2x capex overhead** than restoration
- Again, if we consider **all cost factors**, we can reach a trade-off!


- One way to **measure flexibility**
so far only relatively between multiple systems
- Results can be **less intuitive** than one might think
- Flexibility tends to decrease **cost** but also comes at a cost
- Measure can be used to **design for flexibility**
- **Adaptation time** is important for a flexible system

- **Adaptation time** is very important for a flexibility measure
- Adaptation examples:
 - Function placement, e.g., SDN controller
 - (re-)embedding of virtual networks/flows, e.g. for resilience
- How can we speedup?
- Yet another heuristic for a specific case study?

We propose:

- Keep your favourite optimization algorithms and
- ***Boost your network algorithm with **ML preprocessing*****

How can we boost the solving of the related optimization problems?

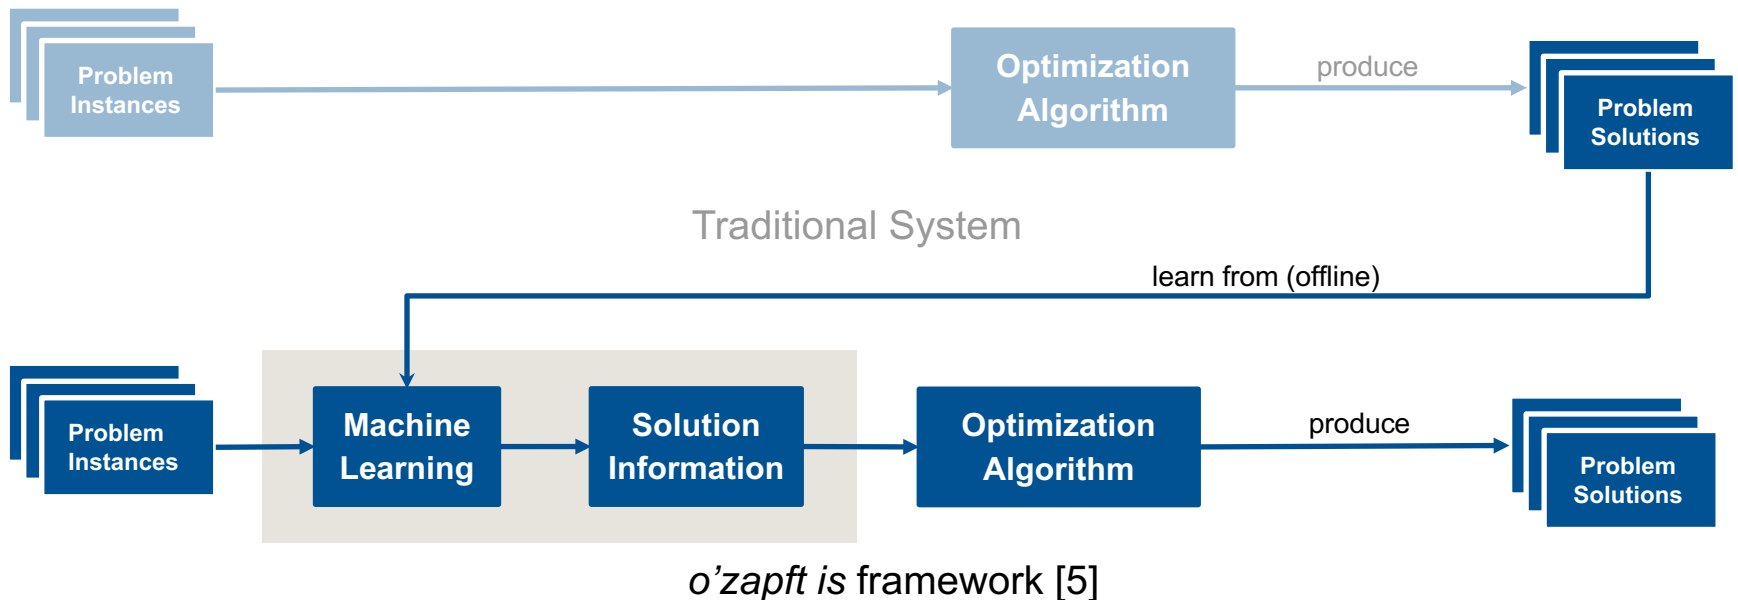


State-of-the-art: Neglects produced data!

Idea: Use problem/solution data generated by algorithms regularly solving problems

[5] A. Blenk, P. Kalmbach, S. Schmid, W. Kellerer: ***o'zapft is: Tap Your Network Algorithm's Big Data!*** ACM SIGCOMM 2017 Wrksp. on Big Data Analytics and Machine Learning for Data Communication Networks (Big-DAMA), 2017.



Data Available: P. Kalmbach, J. Zerwas, M. Manhart, A. Blenk, S. Schmid, W. Kellerer. Data on "o'zapft is Tap Your Network Algorithm's Big Data!", 2017 <https://doi.org/10.14459/2017md1361589>

Case Study: Predicting Acceptance Probabilities of VNE Requests

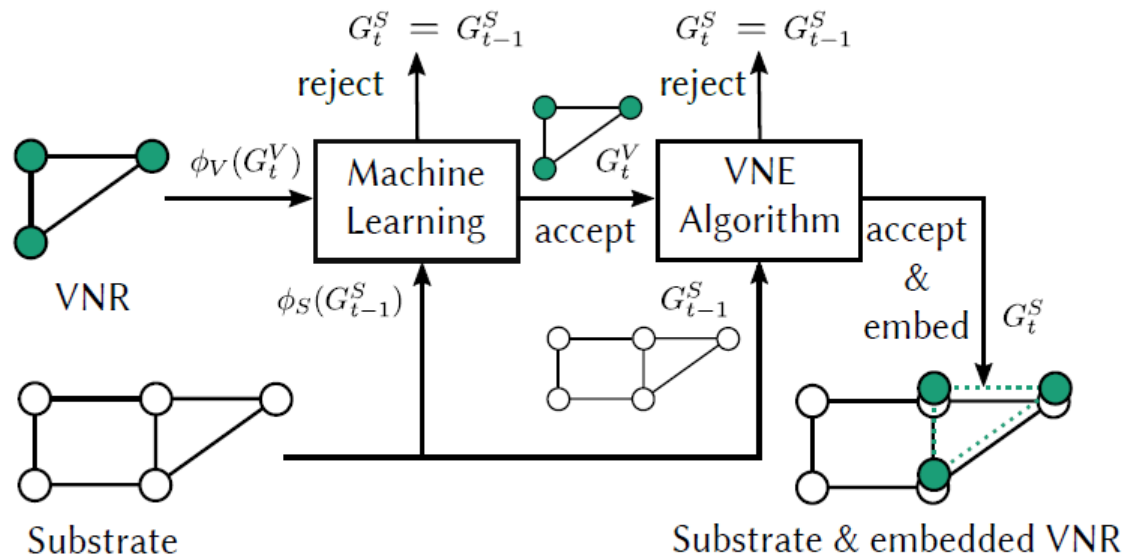

- Supervised learning: **use data with accepted and rejected requests!** Offline training!
- Recurrent neural network (RNN) for classification
- **Filter** infeasible and requests with unacceptable algorithm runtime (“no solution”)


Can we speed-up optimal algorithms using admission control?

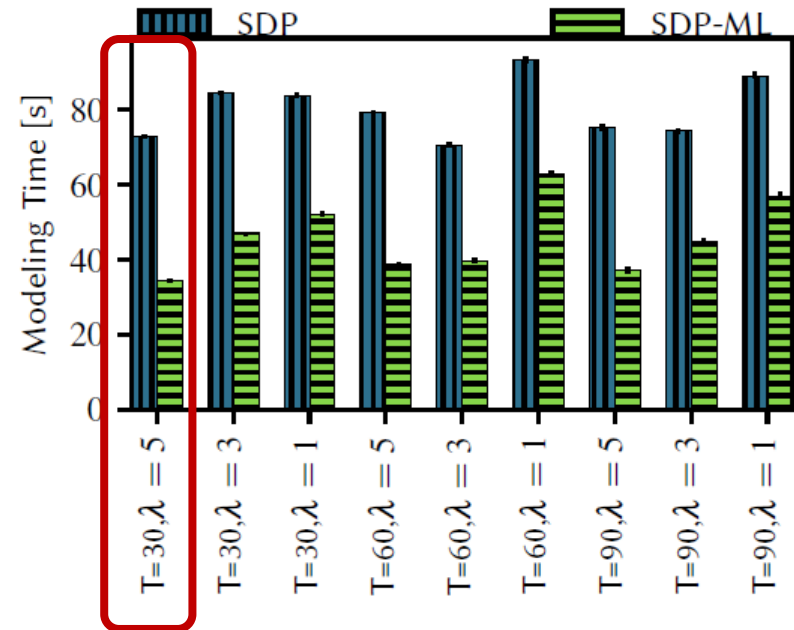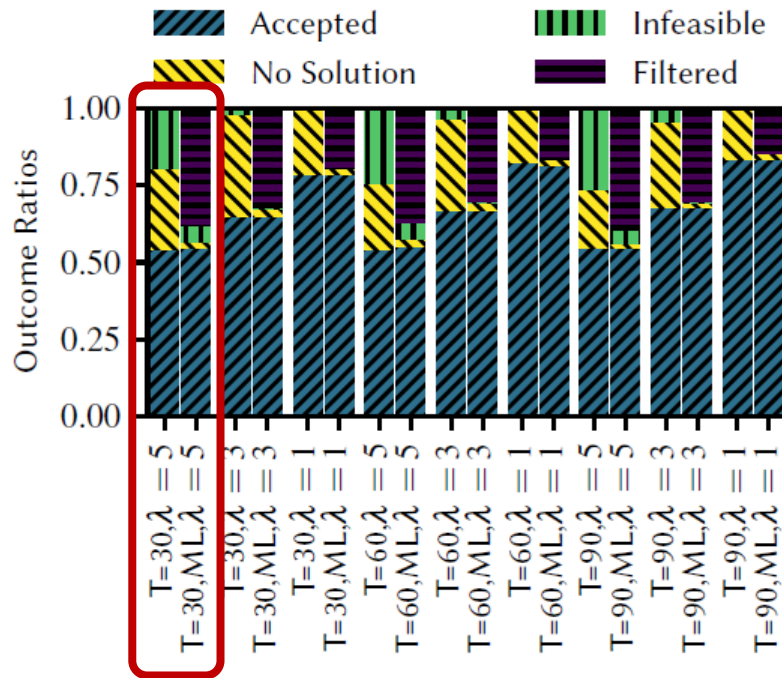

Efficient Filtering of infeasible and unacceptable requests
Efficient saving of model creation time



Latest Results: Neurovine [6]

*Hopfield neural network to preprocess (subgraph extraction) VNE algorithms
– tailored filtering*

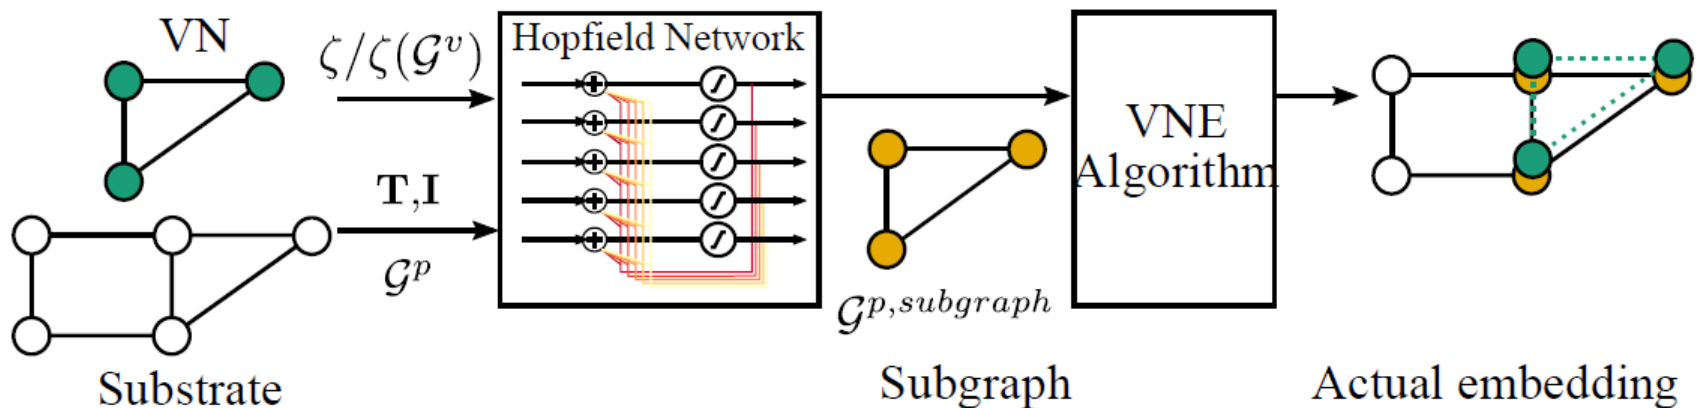

- Idea: Extract subgraph with physical **nodes close to each other** and **high available capacities**

Neurovine: Efficiency on Real Network Topologies

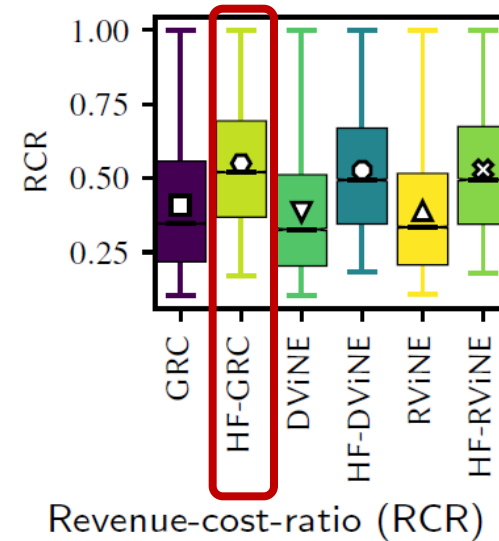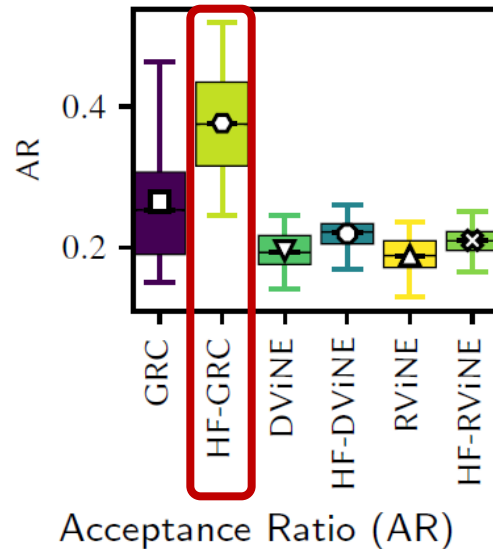

- VNE algorithms (GRC, DViNE, RViNE) vs. Hopfield variants (HF-GRC, HF-DViNE, HF-RViNE)
- NeuroViNE accepts more networks with less costs

Flexibility matters!

- We propose a
 - definition and measure for flexibility**
 - to compare flexible systems
 - to explicitly **design for flexibility**
- **Adaptation/optimization time** is important for flexible systems
 - Speedup** optimization algorithms through
 - Machine Learning-based preprocessing**
- Recent work: **Empowerment** concept to design for flexibility [7]

[7] P. Kalmbach, J. Zerwas, P. Babarczy, A. Blenk, W. Kellerer, S. Schmid: **Empowering Self Driving Networks**, accepted for ACM SIGCOMM 2018 workshop on self-driving networks August 2018.

- [1] Sdxcentral. Carriers 5G Plans are Rooted in SDN/NFV, says Ixia Survey. [Online]. Available:[https://www.sdxcentral.com/articles/news/carriers-5g-plans-rooted-sdnnfv-says-ixia-survey/2017/09/?c action=related articles](https://www.sdxcentral.com/articles/news/carriers-5g-plans-rooted-sdnnfv-says-ixia-survey/2017/09/?c%20action=related%20articles)
- [2] W. Kellerer, A. Basta, A. Blenk, Using a Flexibility Measure for Network Design Space Analysis of SDN and NFV, IEEE INFOCOM Workshop, SWFAN'16, SF, USA, April 2016.
- [3] W. Kellerer, A. Basta *et al.*, "How to measure network flexibility? A proposal for evaluating softwarized networks," *IEEE Communications Magazine*, 2018.
- [4] M. He, A. Basta, A. Blenk, W. Kellerer, *How Flexible is Dynamic SDN Control Plane?*, IEEE INFOCOM Workshop, SWFAN'17, Atlanta, USA, May 2017.
- [5] A. Blenk, P. Kalmbach, S. Schmid, W. Kellerer: o'zapft is: Tap Your Network Algorithm's Big Data! ACM SIGCOMM 2017 Wrks. on Big Data Analytics and Machine Learning for Data Communication Networks (Big-DAMA), 2017.
- [6] Andreas Blenk, Patrick Kalmbach, Johannes Zerwas, Michael Jarschel, Stefan Schmid, Wolfgang Kellerer: NeuroViNE: A Neural Preprocessor for Your Virtual Network Embedding Algorithm IEEE INFOCOM 2018 (main conference), Honolulu, HI, USA, April 15-19, 2018.